

2200 SERIES

Don't let the compact design of the Remco Economy Plus 2200 Series diminish the fact that it is hardened and prepared for extreme conditions. This pump proves that big things come in small packages.

Economy Plus+

PRESSURE RANGE: 40 PSI

PUMP OPTIONS

- ▶ FLUID PORTS: 3/8" HOSE BARB
- ▶ VOLTAGE: 12 / 24 VDC
- ▶ MATERIALS: VITON / SANTOPRENE / POLY
- ▶ PACKAGING: BULK / RETAIL AVAILABLE
- ▶ INTEGRATED ON/OFF SWITCH AVAILABLE

STANDARD FEATURES


- ▶ PROFESSIONAL GRADE QUALITY
- ▶ COMPACT AND EFFICIENT DESIGN
- ▶ LOW HEAT AND POWER CONSUMPTION
- ▶ QUIET OPERATION

TYPICAL APPLICATIONS

- ▶ AG AND INDUSTRIAL CHEMICAL SPRAYING
- ▶ AUTOMOTIVE FLUID EXCHANGE
- ▶ FOOD AND BEVERAGE SERVICE
- ▶ ICE REMOVAL

PUMP DIMENSIONS

(DIMENSIONS MAY VARY BY MODEL)

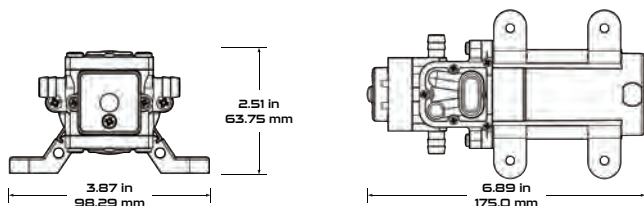

PUMP CONFIGURATIONS

(ADDITIONAL CONFIGURATIONS AVAILABLE)

STANDARD

Item Number	Flow	Controls	Pressure	Valves	Diaphragm	Ports	Voltage
2240-1B1-10E	1.0 GPM (3.78 LPM)	DEMAND	40 PSI (2.8 BAR)	SANTOPRENE	SANTOPRENE	3/8" HOSE BARB	12 VDC
2240-1B1-20E	1.0 GPM (3.78 LPM)	DEMAND	40 PSI (2.8 BAR)	SANTOPRENE	SANTOPRENE	3/8" HOSE BARB	24 VDC
2240-1B1-10I	1.0 GPM (3.78 LPM)	DEMAND	40 PSI (2.8 BAR)	SANTOPRENE	SANTOPRENE	3/8" HOSE BARB	12 VDC (ON/OFF SWITCH)

RETAIL OPTIONS

Item Number	Flow	Controls	Pressure	Valves	Diaphragm	Ports	Voltage
2240-1B1-10E-SB	1.0 GPM (3.78 LPM)	DEMAND	40 PSI (2.8 BAR)	SANTOPRENE	SANTOPRENE	3/8" HOSE BARB	12 VDC




OPEN FLOW RANGE: 1.0 GPM

TECHNICAL INFORMATION

- ▶ 18 AWG - 6" 2-PIN MOLD / CUSTOM CONNECTION
- ▶ 4FT (1.2M) PRIMING CAPABILITY
- ▶ INTERMITTENT DUTY CYCLE
- ▶ DRY RUN CAPABILITY
- ▶ 140°F (60°C) MAX LIQUID TEMPERATURE
- ▶ 180°F (82°C) MAX MOTOR TEMPERATURE

PUMP PERFORMANCE

(PERFORMANCE MAY VARY)

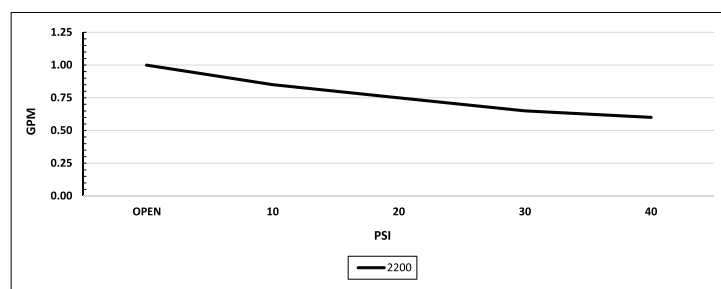

RECOMMENDED PARTS & ACCESSORIES



901-009-R