

Typical Applications



HERBICIDE
CONTACT
VERY GOOD
SYSTEMIC
GOOD



FUNGICIDE
CONTACT
EXCELLENT
SYSTEMIC
GOOD



INSECTICIDE
CONTACT
EXCELLENT
SYSTEMIC
GOOD



DRIFT CONTROL
GOOD




PWM APPROVED




FEATURES

- Tapered edge flat spray angle pattern for uniform coverage in broadcast spray application.
- Reduces drift at lower pressures, better coverage at higher pressures.
- Ceramic is available with corrosive resistant polypropylene VisiFlo color-coded tip holder in 80° capacities 03-08 and 110° capacities 02-08.
- XR110025 only available in VK.
- XR80025 and XR80035 only available in VS.
- Brass available in 110° only.
- Automatic spray alignment with 114441A-*-CELR (01 to 08) or 114443A-*-CELR (10 and 15) Quick TeeJet® cap and gasket. Reference page 118 for more information.

SPRAY PATTERN



DROPLET SIZE CLASSIFICATION

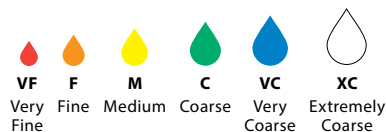

OPTIMUM SPRAY HEIGHT

ANGLE	20" SPACING HEIGHT
80°	30"
110°	20"

RECOMMENDED PRESSURE RANGE



MATERIALS AVAILABLE

- VS** STAINLESS STEEL
- VP** POLYMER
- VK** CERAMIC
- VB** BRASS
- SS** STAINLESS STEEL

HOW TO ORDER

Ceramic with VisiFlo® color-coding

X R 1 1 0 0 4 - V K

Tip Type Spray Angle Capacity Size Material Code

Polymer with VisiFlo color-coding, includes Quick TeeJet cap and gasket*

X R 1 1 0 0 2 - V P - C E

Tip Type Spray Angle Capacity Size Material Code Cap and Gasket Included

*Reference page 118 for more caps information.