

PW4000A

The model PW4000A GunJet is a durable high-pressure spray gun that offers comfort and control. Trigger locks into an off position to prevent accidental discharge. The PW4000A operates at up to 4,000 PSI and provides flow rates up to 10 GPM. Liquid temperatures up to 300°F. Available with 1/4" or 3/8" NPT or BSPT inlet and outlet connections.




AA30A

Maximum pressure rating of 1,500 PSI with 5 GPM up to 200°F and 1/4" (F) NPT or BSPT inlet thread. Materials including Nylon handles and trigger guards, forged brass valve bodies, Buna-N or FKM stem seals, PTFE valve seats and stainless steel working parts mean long, productive equipment life.

HOW TO ORDER

AA(B)30A - 1/4

(B)=BSPT

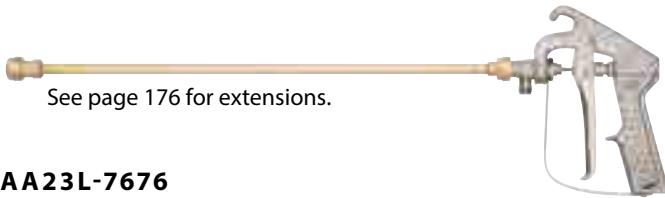

See page 176 for extensions.

AA23L-7676

The AA23L-7676 GunJet spray gun (shown above) is also available without extension as GunJet spray gun AA23L. Flow rates up to 5 GPM. Maximum operating pressure of 250 PSI. Inlet 1/4" NPS (M) thread. Strong aluminum alloy body. When used with extension, the valve stem extends through the entire extension length for drip-free shutoff immediately behind the spray tip. Accommodates all interchangeable TeeJet spray tips.

GUNJET NUMBER	EXTENSION LENGTH (IN)
AA23L	Without Extension
AA23L-7676-8	8
AA23L-7676-18	18
AA23L-7676-24	24
AA23L-7676-36	36
AA23L-7676-48	48

HOW TO ORDER

AA23L



HOW TO ORDER

(B)PW4000A

3/8" inlet and 1/4" outlet

(B)PW4000A - 1/4 x 1/4

1/4" inlet and outlet

(B)PW4000A - 3/8 x 3/8

3/8" inlet and outlet

(B)=BSPT

AA30L-PP

This version of the standard AA30L GunJet spray gun is constructed of polypropylene for excellent corrosion resistance. The maximum pressure rating is 150 PSI with flow rates up to 5 GPM. Liquid inlet connection available in 1/4" (F) NPT or BSPT. Wetted parts are polypropylene, stainless steel and FKM.



HOW TO ORDER

AA(B)30L - PP

(B)=BSPT



AA30L-22425

The AA30L-22425 GunJet spray gun (shown above) is also available without extension as GunJet spray gun AA30L. Flow rates up to 5 GPM. Maximum operating pressure of 250 PSI. Outlet connection is 1/16"-16 TeeJet thread. Body and trigger molded of tough Nylon. When used with extension, the valve stem extends through the entire extension length for drip-free shutoff immediately behind the spray tip. Accommodates all interchangeable TeeJet spray tips.

GUNJET NUMBER	EXTENSION LENGTH (IN)
AA(B)30L-1/4	Without Extension
AA(B)30L-22425-8	8
AA(B)30L-22425-18	18
AA(B)30L-22425-24	24
AA(B)30L-22425-36	36
AA(B)30L-22425-48	48

HOW TO ORDER

AA(B)30L - 1/4

(B)=BSPT